






Rimaster overmolded DT04-2P Deutsch connector




Specifications & qualifications

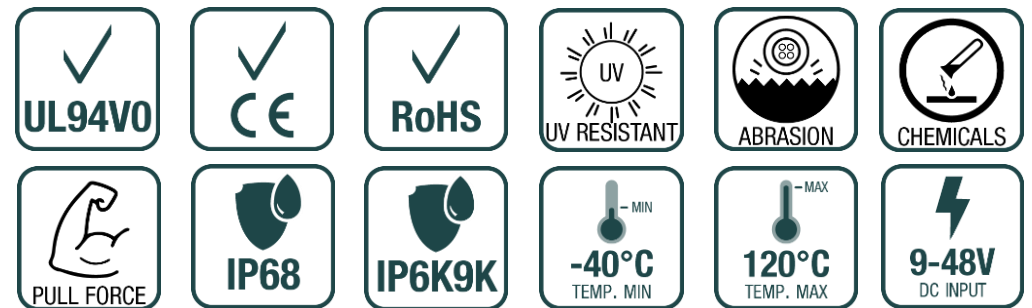

- ✓ IP 68 test - according to IEC 60529
- ✓ IP6K9K test - according to ISO 20653
- ✓ Abrasion - ISO 6722-1:2011, technical card KT/242
- ✓ Temperature cycling - EN/IEC 60068-2-14:2009, Test N
- ✓ Cold T° steady state test - IEC 60068-2-1, test Ab: -40°C, 72h
- ✓ Heat T° steady state test - IEC 60068-2-2, test Bb: +120°C, 72h
- ✓ UV / Solar radiation - EN/IEC 60068-2-5:2018, test S
- ✓ Fluid contamination NPK - IEC 60068-2-74 test Xc: 70°C, 93h
- ✓ Pull force – IEC 60512-8-2 : > 300 N

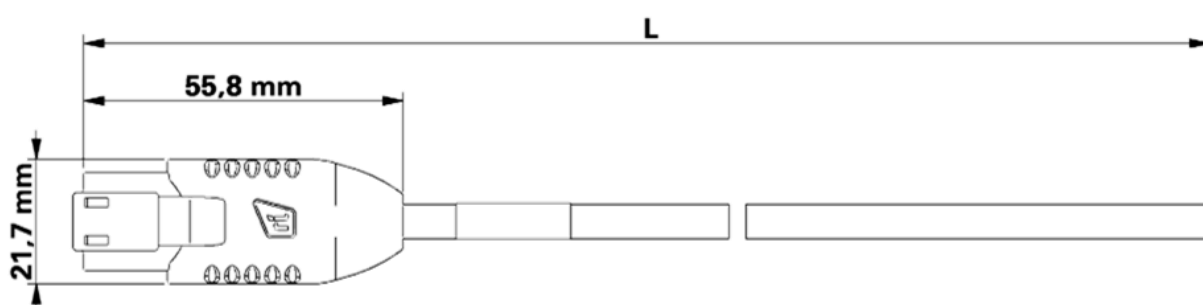

Diagram

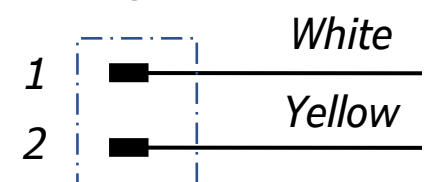

Part Number	L	Cable	Outer diameter	Cable specifications
7100_02445	1000 mm	2x0.75mm ²	∅ 6.1±0.25	PVC HT class C Black Color According to ISO 6722
7100_02446	2000 mm	2x0.75mm ²		
7100_02447	5000 mm	2x0.75mm ²		
7100_02448	10000 mm	2x0.75mm ²		
7100_02495	1000 mm	2x1mm ²		
7100_02496	2000 mm	2x1mm ²		
7100_02497	5000 mm	2x1mm ²		
7100_02498	10000 mm	2x1mm ²		

Specific lengths or custom terminations are possible on demand

Contact us for further informations:

+ 46 494 795 32
+ 46 70 565 89 04
+ 32 470 670 130
+ 33 624 340 049
+ 49 2234 219 3226
+ 48 6023 15843

Ulf Almén (SE)
Andreas Kronström (SE)
Jean-Pierre Vanheel (B)
Julien Fambrini (FR)
Jörg Hagmaier (D)
Hubert Walachowski (PL)



www.rimaster.com